

10.7 to 12.75GHz 15dBm Low Noise Amplifier **LA107127-G25P15**

1, Configuration

- 12.75GHz, SMA-Female Low Noise Amplifier ;
- Low noise figure 1.8dB ;
- Output Power 15dBm ;
- Operating Temperature -55 to +85°C.




2, Specifications (Electrical Specifications measured in a 50Ω system, Values at 25 °C)

Parameter	Unit	Specification	Parameter	Unit	Specification
Freq. Range	GHz /	10.7 - 12.75	Operating Temp.	°C	-55 to +85
Impedance	Ω /	50	ROHS Compliant	/	Yes
Input Power	dBm Max.	/	Input Connectors	/	SMA-Female
Gain	dB Min.	25	Output Connectors	/	SMA-Female
Gain Fla.	dB Max.	±1.5	Dimension L*W*H	mm	34.4*16.8*8.1
NF.	dB Max.	1.8	Weight Max.	g	TBD
In / out VSWR	/ Max.	1.8 / 1.8	Surface	/	original colour
Power@ P-1dB	dBm Min.	15	The Output Port inhibit no-load.		
Power Supply	V /mA Type.	+12 / 170			

Special Request :

3, CAD Drawing

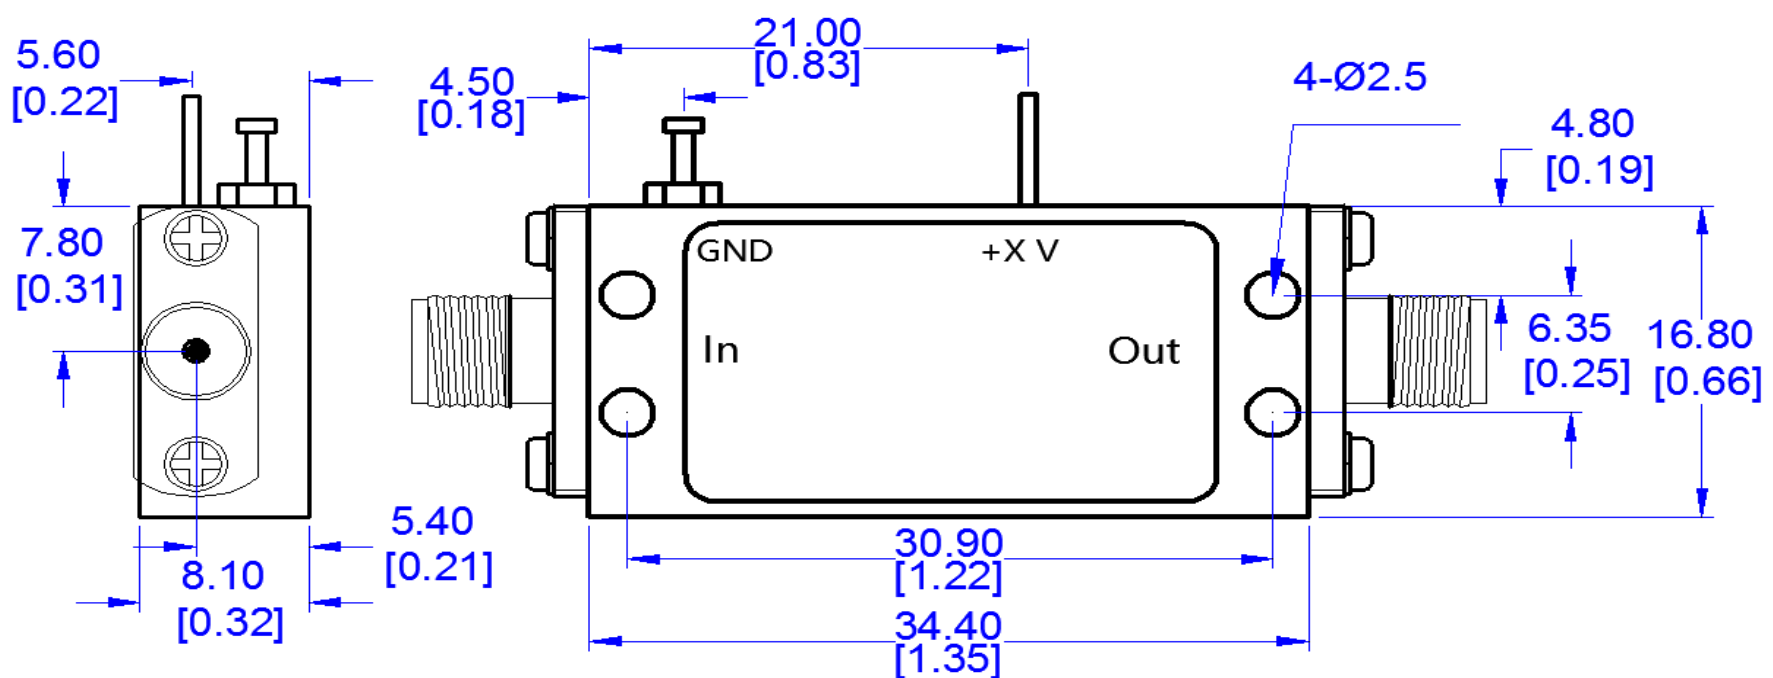

Unit: MM / [Inch], Unless otherwise specified, Outline drawing ±0.2MM ; Hole±0.1MM